










Flexilite Technical Manual www.premier-framework.com T:+44 (0)1227 710104 F:+44 (0)1227 710104


Premier Flexilite Components:

The Premier Flexilite is made up of the following components:

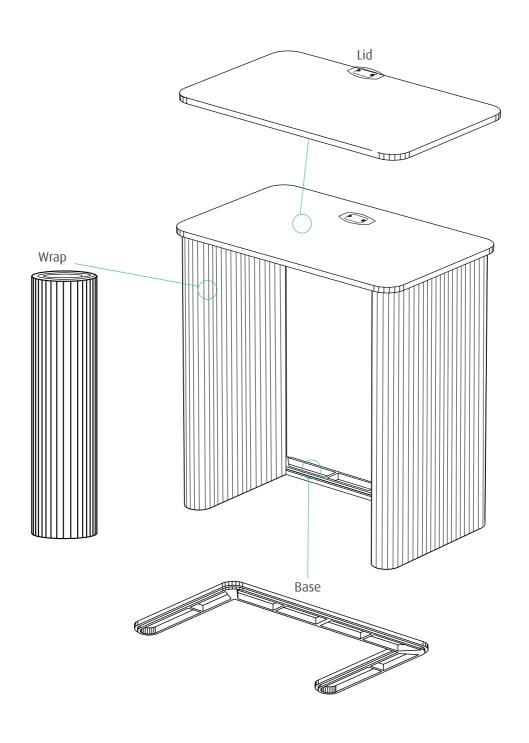

Premier Flexilite Types:

The Premier Flexi-lite is available in three different shapes: Curved, Oval and Rectangular, which are illustrated with their dimensions:

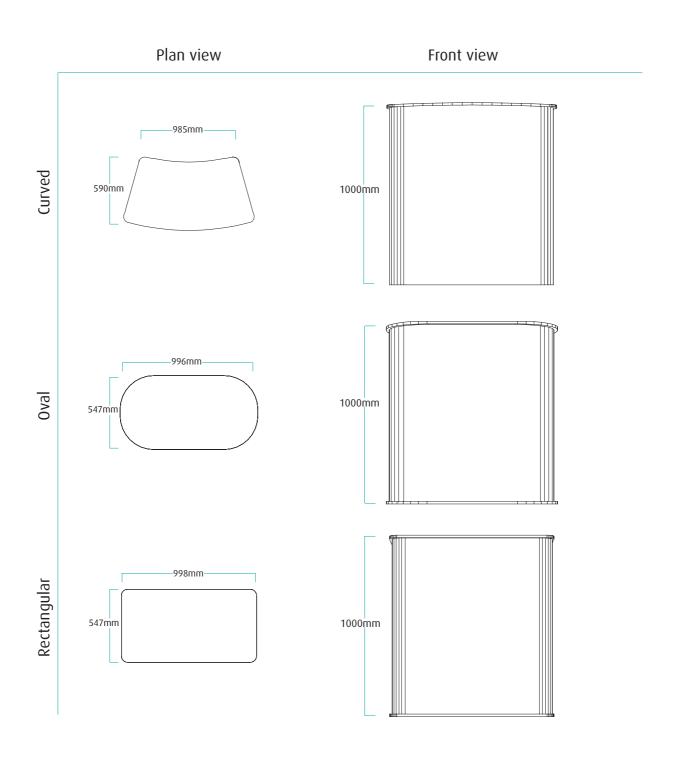


Premier Flexilite Construction:


Flexi-lite is made up of a wooded base and lid with a flexible, corrugated fibre board that can be rolled up and applied to the shape of the base. The following construction diagrams have been done using the Rectangular Flexilite, however the principle is the same for all three types.

Stage 1 - Set up


Start off with the base flat on the floor.



Take the rolled-up 'wrap' and begin attaching the right corner of the wrap onto the inner angle of the base.




The wrap has velcro strips along the top and bottom edges to allow it to adhere solidly to the other strips along the base. Gently start to unroll the roll the wrap, following the shape of the base.




Premier Flexilite Construction:


Stage 2 - Adding the lid



When you have fully unrolled the wrap, this is how your Flexilite should look

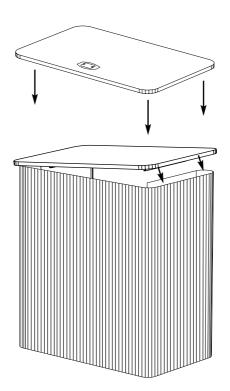

The next step is to attach the lid. Place the lid on top of the unit with the cable tidy facing the front. Push the lid down until it is completely attached to the velcro strips inside the wrap.



The Flexilite is now ready.

Premier Flexilite Construction:

Stage 3 - Applying the graphic panel




Attach the graphic panel to the front of the Flexilite by using the steel tape located on the rear of the graphic and stick it onto the magnetic tape located on the front of the wrap.




The finished Flexilite with the graphic attached.

Premier Flexilite Panel Dimensions:

The graphic panel is the same size for all three types of the Flexilite. When printing your own graphics, it is advisable that you add steel tape to the rear of the panel in order to magnetise the graphic to the magnetic tape on the wrap.

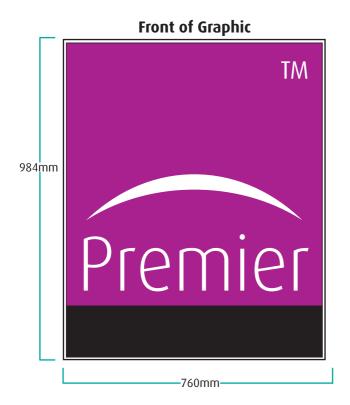

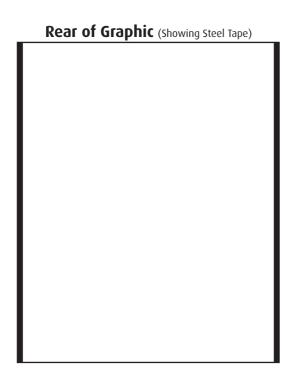




Shelving


There are two types of shelves that can be attached to the Flexilite unit, the inner-shelf and the keyboard shelf. Both of the below options cannot be retro-fitted. This means that you must specify at the time of the ordering what shelf you would like to add onto your unit.

Inner shelf

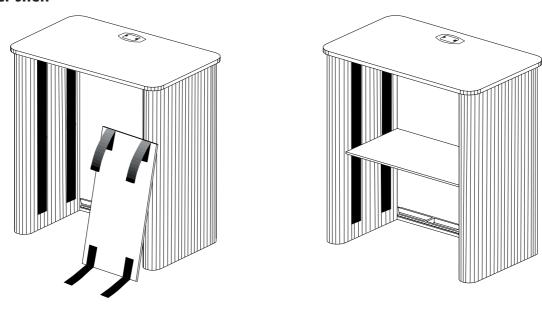

Attach the inner shelf to your Flexilite by using the vertical velcro strips that are shown in black above and run down the inside of the wrap. This shelf is commonly used to hold literature which can support approximately 20kg.


Keyboard shelf



On the underside of the lid you can attach a keyboard shelf which can be used as an extension of the lid or as a standard size keyboard shelf.


Locking Doors

For added security, especially when leaving products or brochures on your stand, a lockable door can be added. This option cannot be retro-fiited. Which means that you must specify at the time of ordering that you would like to add a locking door to your Flexi-lite.

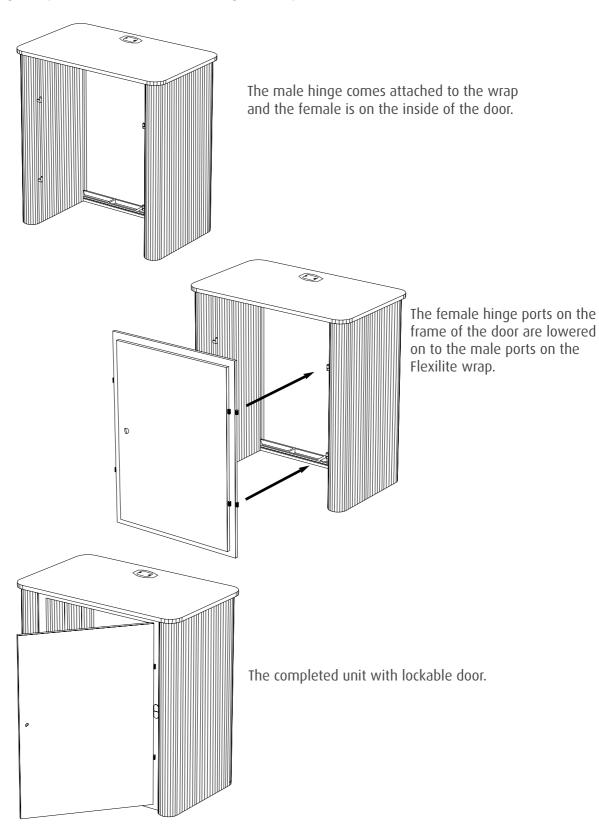

Cable Tidy


The cable tidy comes as standard fitted to all units. Please specify at the time of ordering if it is not required.

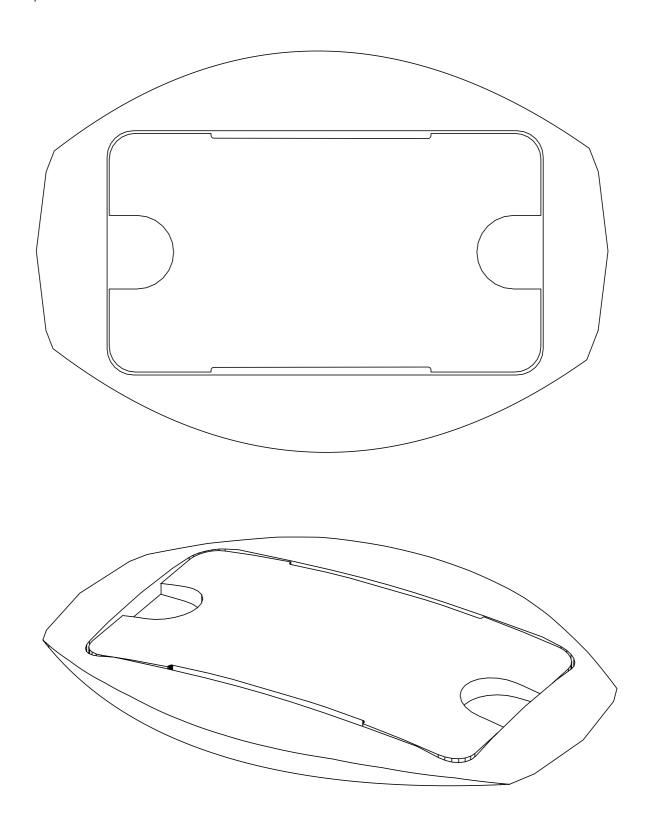

Wheeled Case

Firstly roll the graphic up still attached to the wrap, following by the lid, base and locking door. If you have an inner-shelf and/or keyboard these will fit comfortable as well.

The two diagrams below show the order in which the case should be packed and the dimensions of the case.

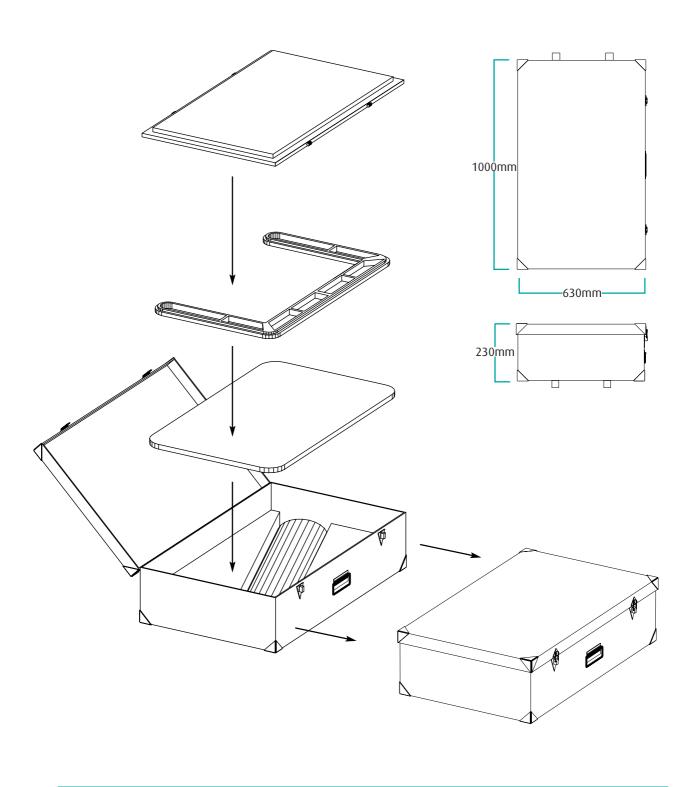

Premier Flexilite Finishes:

The Premier Flexilite is available in these standard finishes. Please be aware that you can match different finishes for the wrap and the lid.



Work top surfaces

From left to right: Granite Silver Beech Black

